This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images, please do not report the images to the Image Problem Mailbox.

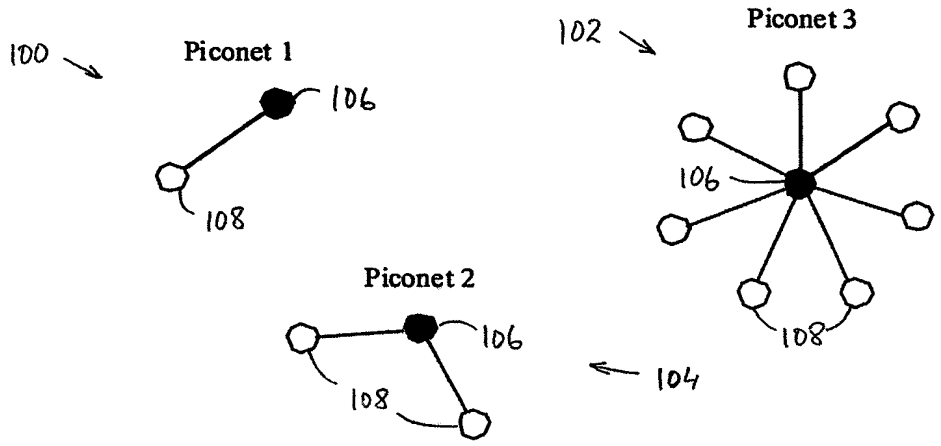

FIG. 1
(Prior Art)

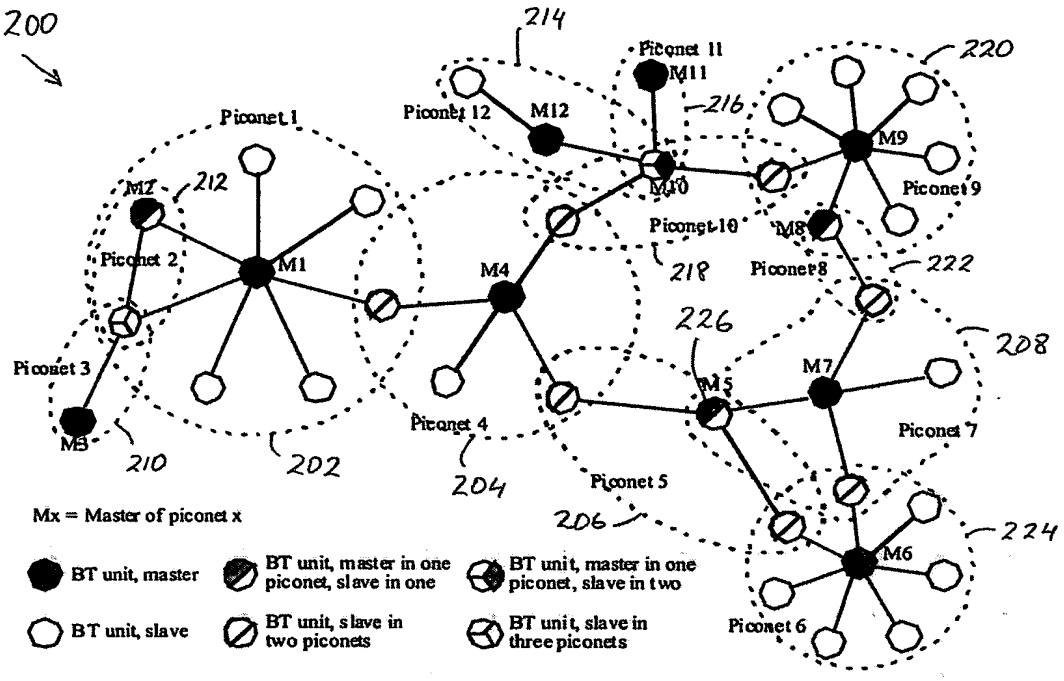

FIG. 2
(Prior Art)

FIG. 3
(Prior Art)

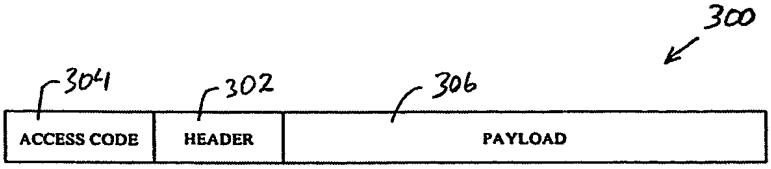

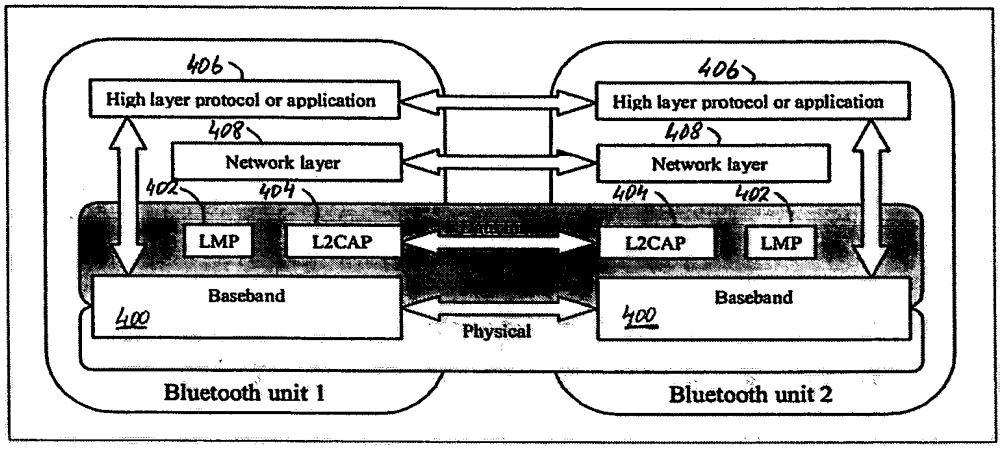

FIG. 4
(Prior Art)

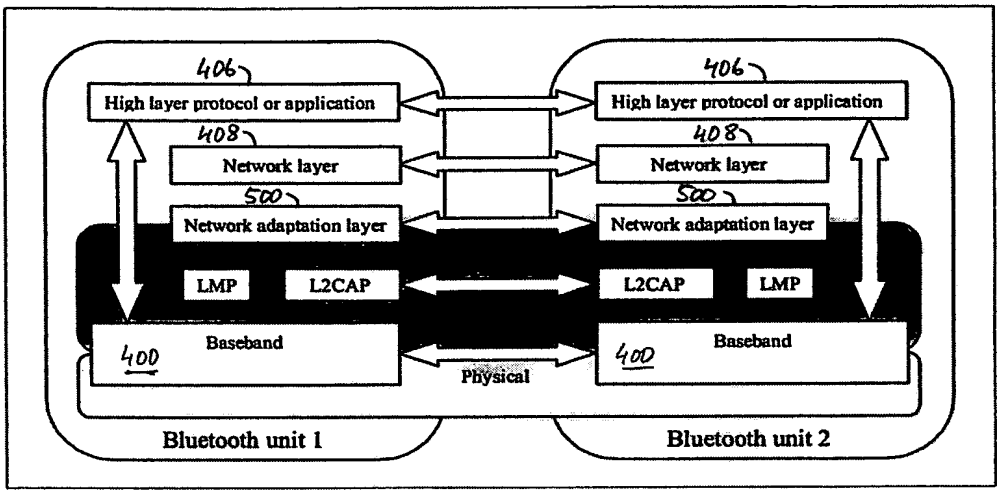

FIG. 5
(Prior Art)

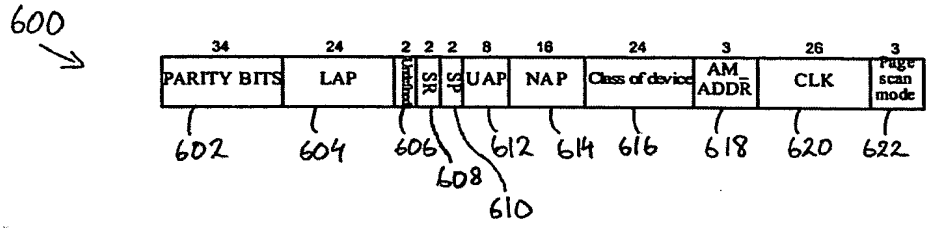

FIG. 6
(Prior Art)

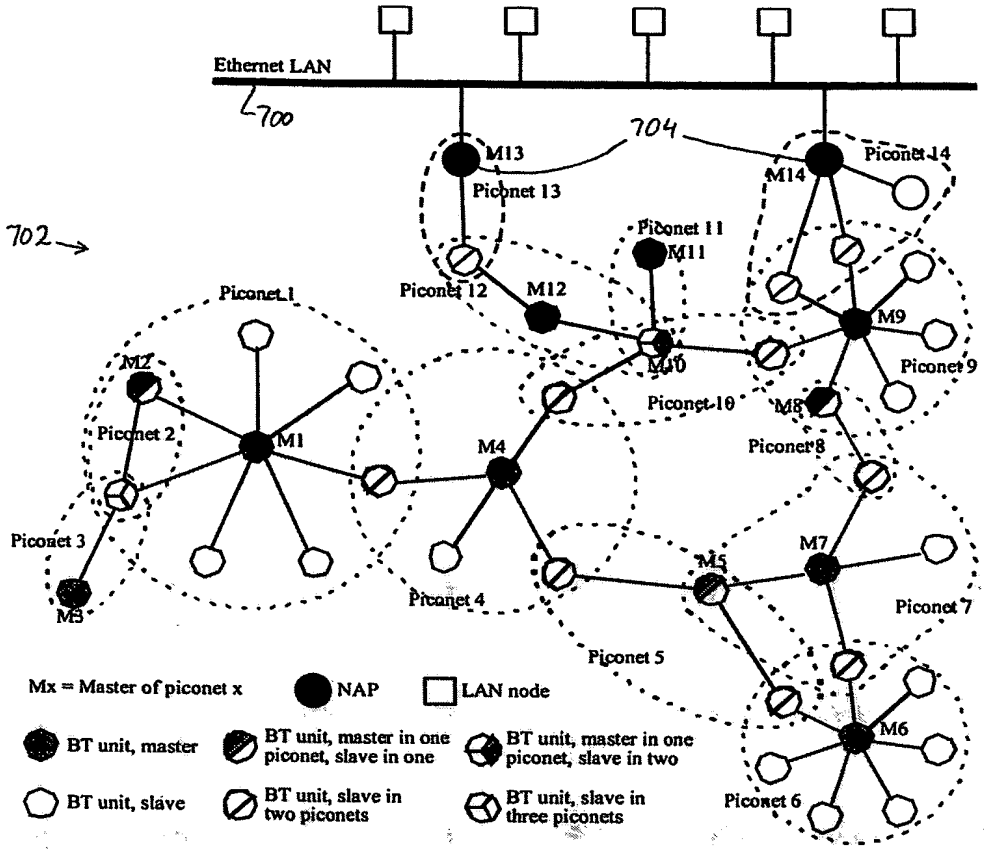

FIG. 7
(Prior Art)

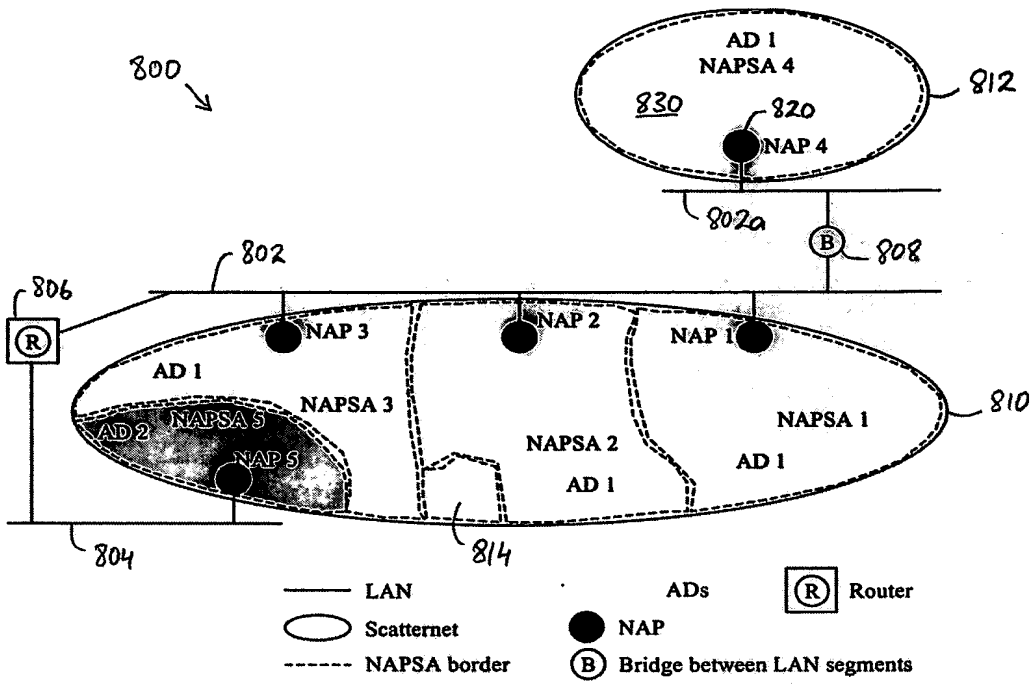

FIG. 8
(Prior Art)

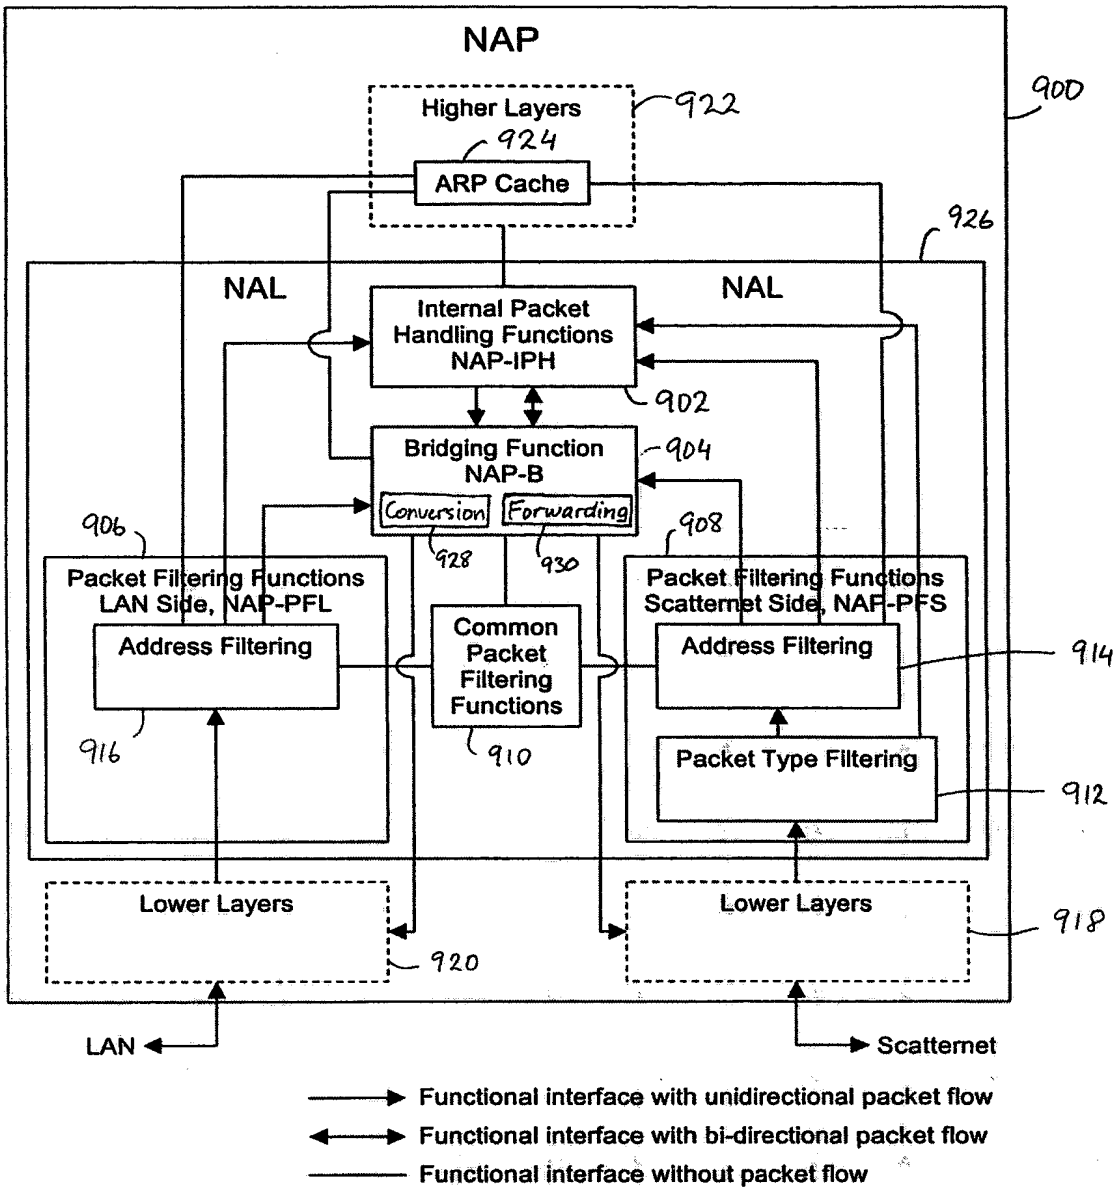
NAP
900
Higher Layers
922
924
ARP Cache
926
NAL
NAL
Internal Packet Handling Functions NAP-IPH
902
Bridging Function NAP-B
904
Conversion
Forwarding
928
930
906
908
Packet Filtering Functions LAN Side, NAP-PFL
Address Filtering
916
Common Packet Filtering Functions
910
Packet Filtering Functions Scatternet Side, NAP-PFS
Address Filtering
914
Packet Type Filtering
912
Lower Layers
920
Lower Layers
918
LAN
Scatternet
Functional interface with unidirectional packet flow
Functional interface with bi-directional packet flow
Functional interface without packet flow

FIG. 9

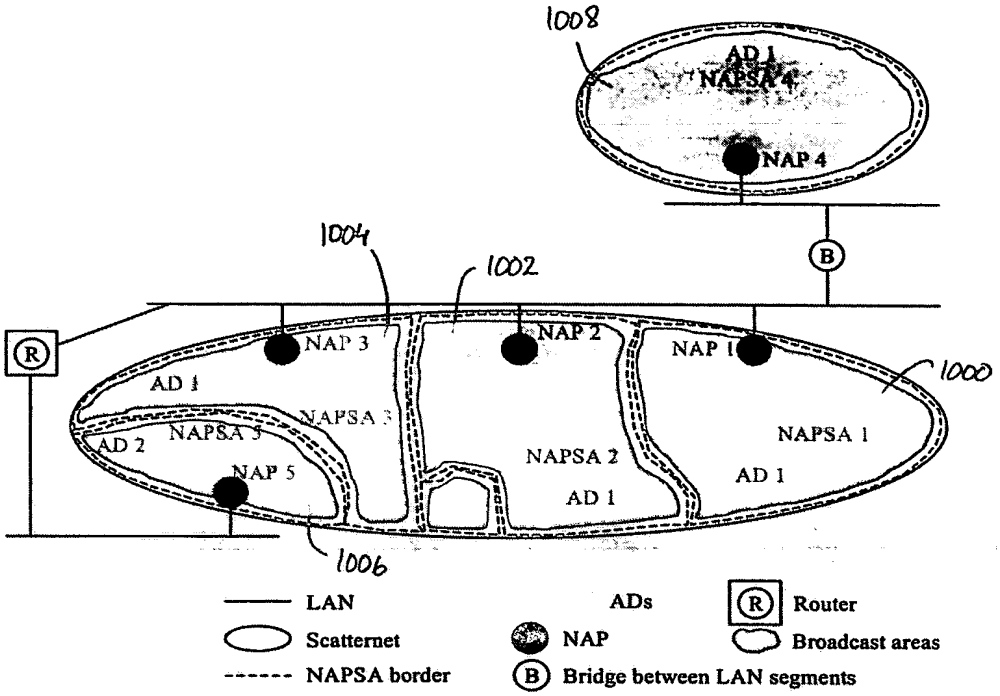
1008
AD 1
NAPSA 4
NAP 4
B
1004
1002
R
NAP 3
NAP 2
NAP 1
1000
AD 1
NAPSA 3
NAPSA 5
AD 2
NAP 5
NAPSA 2
AD 1
NAPSA 1
AD 1
1006
LAN
ADs
R
Router
Scatternet
NAP
Broadcast areas
NAPSA border
B
Bridge between LAN segments

FIG. 10

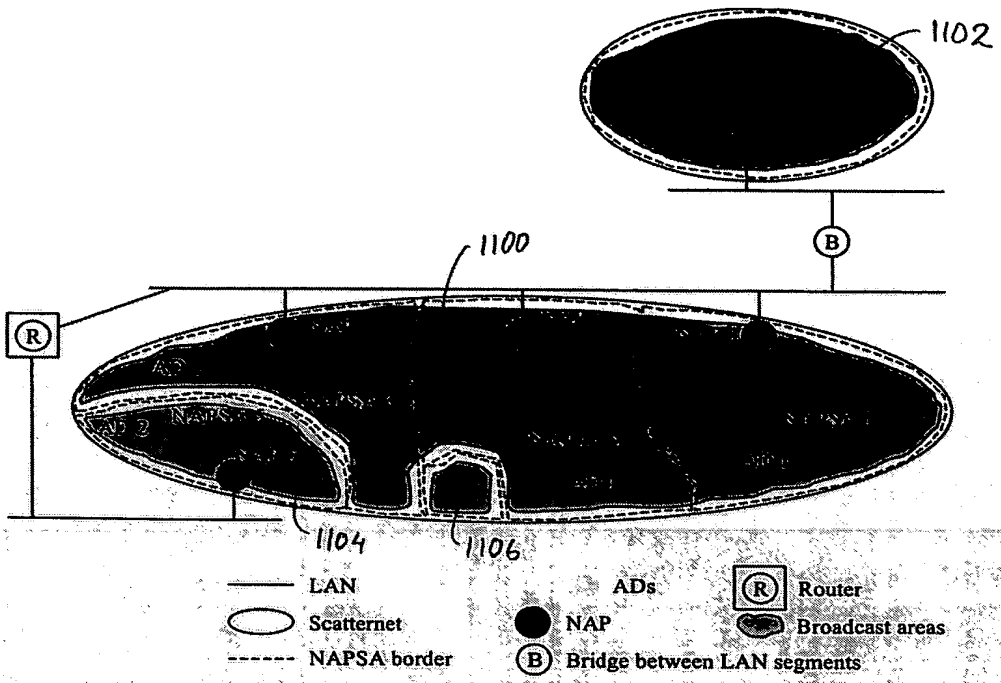
1102
1100
B
R
1104
1106
LAN
Scatternet
NAPSA border
ADs
NAP
B Bridge between LAN segments
R Router
Broadcast areas

FIG. 11

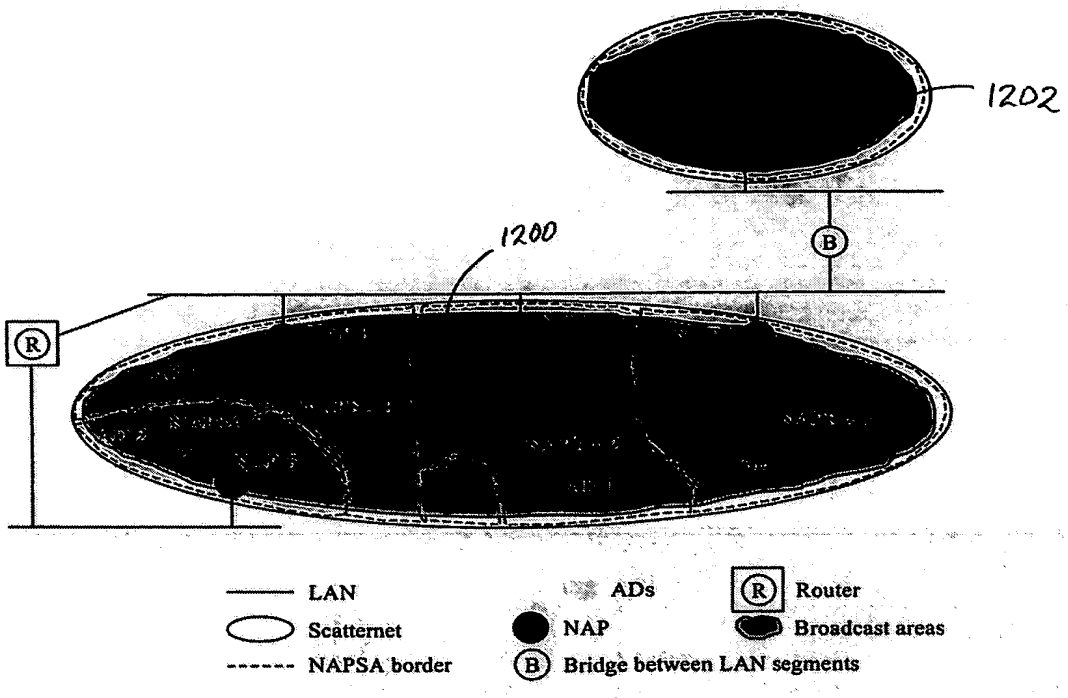
1202
1200
R
B
LAN
Scatternet
NAPSA border
ADs
NAP
Bridge between LAN segments
R
Router
Broadcast areas

FIG. 12

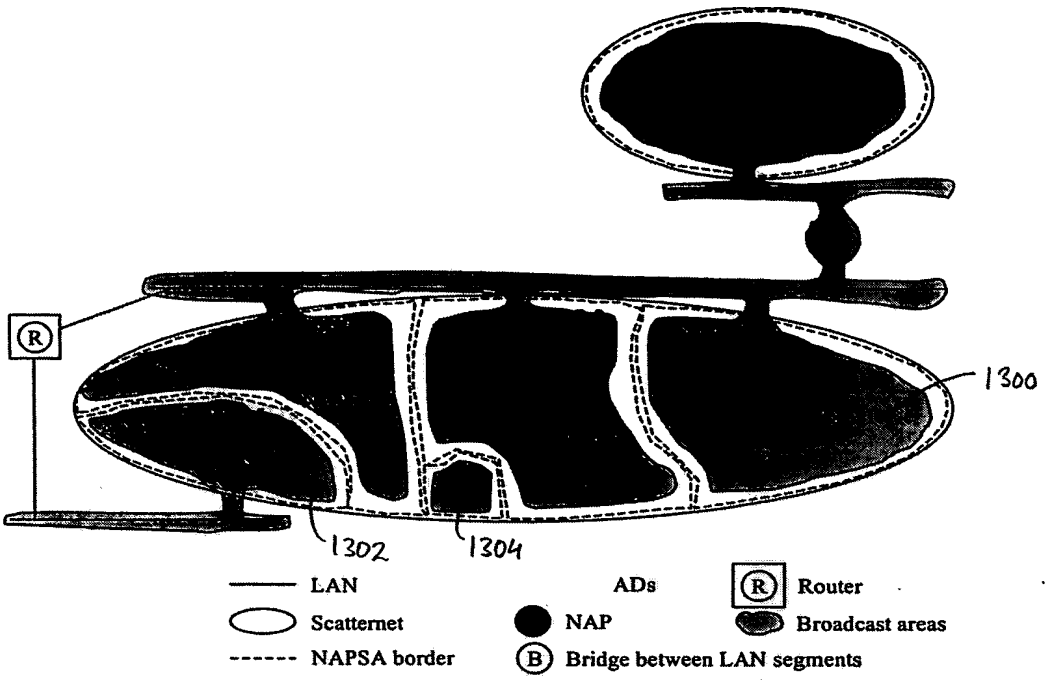
R
1300
1302
1304
LAN
Scatternet
NAPSA border
ADs
NAP
B
Bridge between LAN segments
R
Router
Broadcast areas

FIG. 13

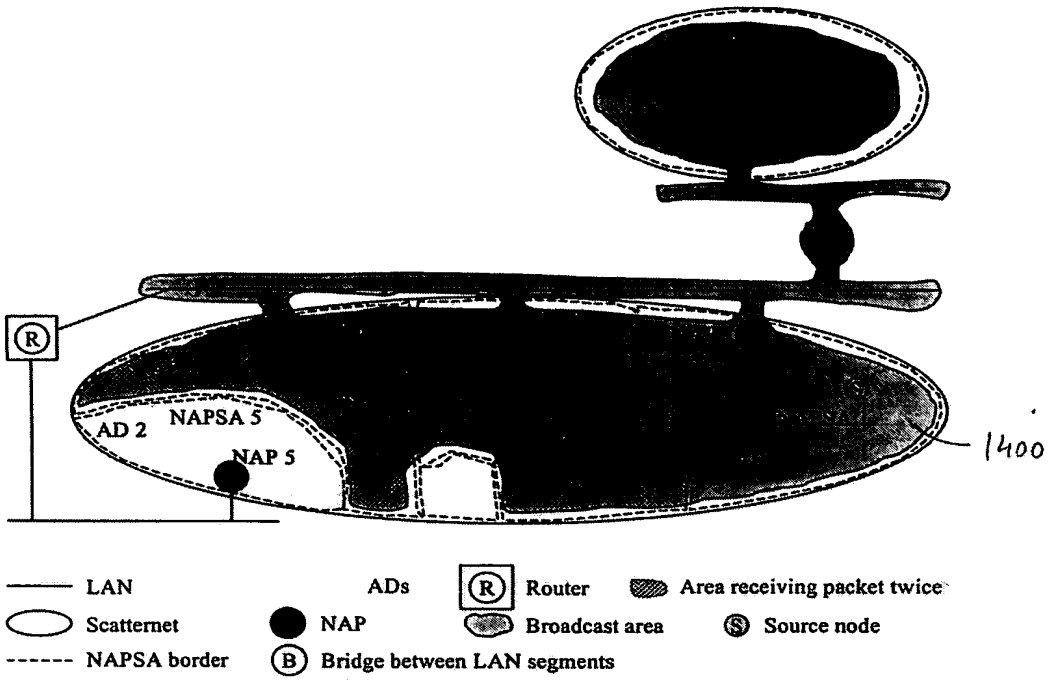
R
AD 2
NAPSA 5
NAP 5
1400
LAN
ADs
R
Router
Area receiving packet twice
Scatternet
NAP
Broadcast area
S
Source node
NAPSA border
B
Bridge between LAN segments

FIG. 14

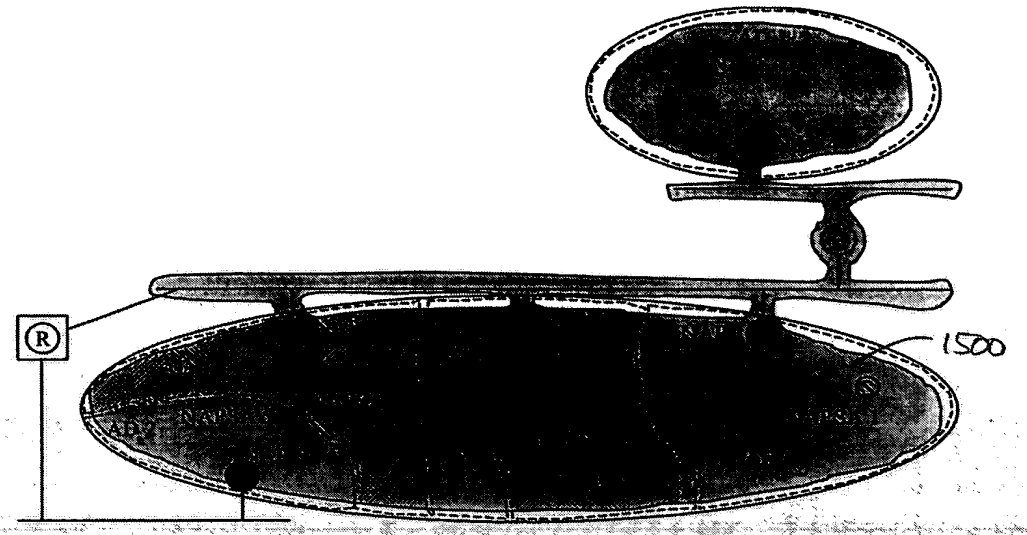

LAN
Scatternet
NAPSA border
ADs
NAP
Bridge between LAN segments
Router
Broadcast area
Area receiving packet twice
Source node

FIG. 15

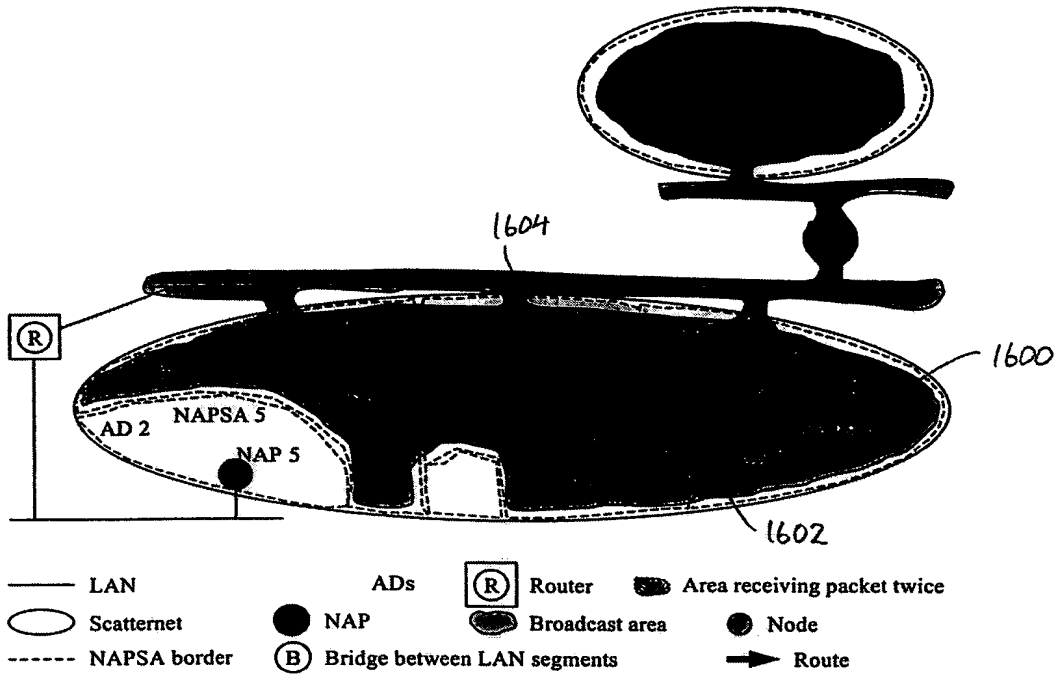
1604
1600
1602
R
AD 2
NAPSA 5
NAP 5
LAN
Scatternet
NAPSA border
ADs
NAP
B
Bridge between LAN segments
R
Router
Broadcast area
Area receiving packet twice
Node
Route

FIG. 16

Ethernet packet format



NAL unicast packet format

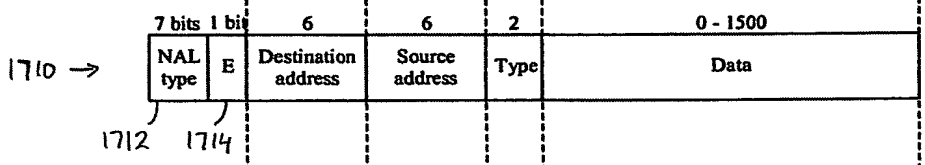

NAL broadcast packet format

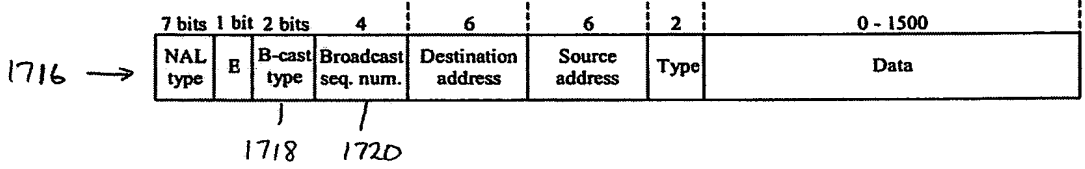

FIG. 17

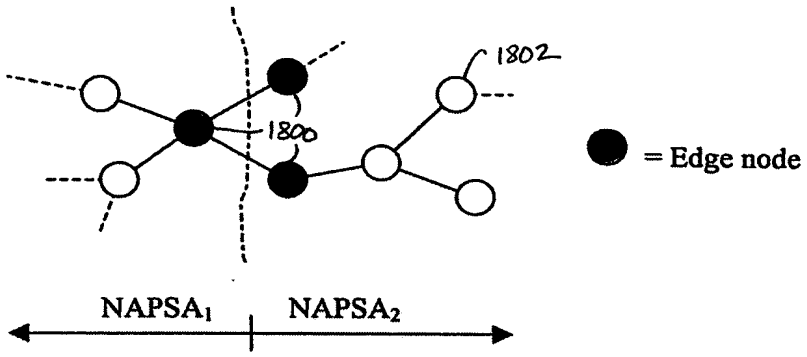

FIG. 18

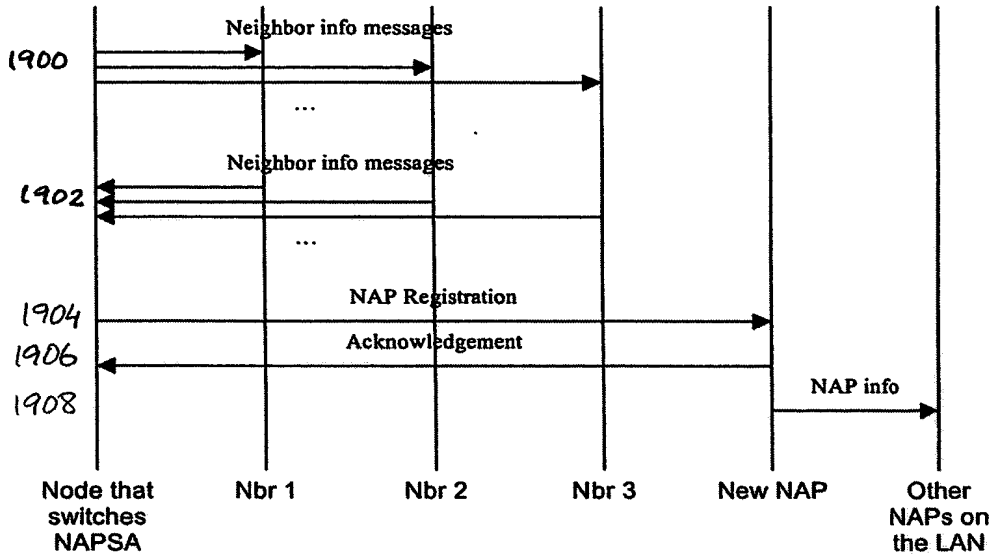
1900
Neighbor info messages
...
1902
Neighbor info messages
...
1904
NAP Registration
1906
Acknowledgement
1908
NAP info
Node that switches NAPSA
Nbr 1
Nbr 2
Nbr 3
New NAP
Other NAPs on the LAN

FIG. 19


2000
2002
2004
2006
2008
2010
SRC
DST
ETHT
MSG ID
INAPP message data

FIG. 20


2100
2102
2106
2104
NAL TYPE
E
NAL PACKET

FIG. 21